

AXOLIFT: Offering smart and safe alternatives to ladders

P300

<https://www.gbhw.nl/>

P300: PUSH AROUND SMALL SCISSOR LIFT




- Environmentally friendly
- Without CO2 emission or gas leakage
- Low cost maintenance
- 8 hours continuous working

P300 platform is a non-motorized push around scissor lift designed specifically for low-level access and can withstand the demands of everyday use on site while offering enhanced safety features. With its mini dimensions, light weight and its great stability the P300 platform is easy to move by one person only.

- Battery charger indicator.
- Forklift pockets.
- Easily passes through standard doorway.
- Designed for tough site conditions.
- High resistance powdered paint Orange RAL 2000.
- Marking and conformity CE- Compliance with the standard EN 280.

SAFETY:

- Saloon- door style entry gates.
- Foot brake on rear wheels.
- Auto brake system.
- Tilt sensor.
- Emergency lowering system.
- Overload alarm

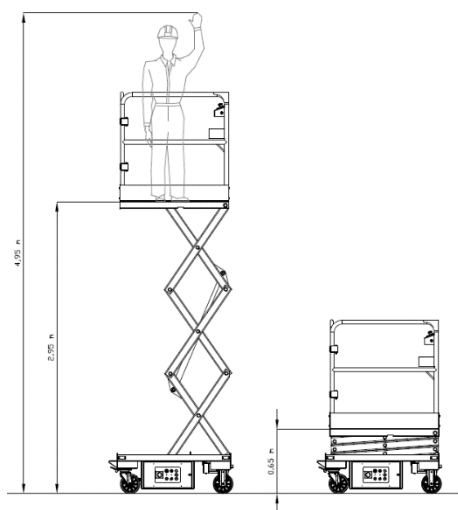

P300 technical data

Dimension:

Max. Working Height:	4,95 m
Max. Platform Height:	2,95 m
Overall Width:	765 mm
Overall Length:	1273 mm
Stowed Height:	1776 mm
Work Platform:	631x 1114 mm
Ground Clearance:	50 mm

Performance:

Platform Capacity SWL:	240kg / 1 pers.
Tool Tray Capacity:	20 kg
Raise/ Lower Time:	15 Sec.
Allowable Cant:	0° - Internal Use
Max. Wind Speed:	0km/h- Internal Use

Power:

Power Source:	24 Volt DC Battery
Charger:	24V- 11A

Weight:

Gross Weight:	390 kg
---------------	--------



GB Hoogwerkers B.V.

Gieterijstraat 63, 2984AB, Ridderkerk,
NL+31 10 200 2083

➤ info@gbhw.nl
➤ www.gbhw.nl

