



With Us, You can

# HIGH GREEN SAFE

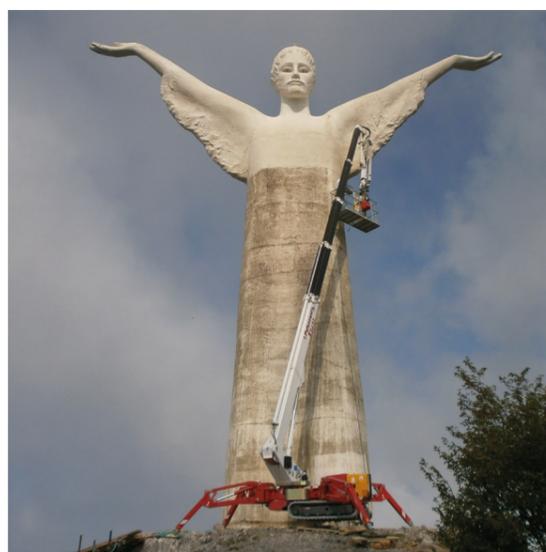

- 
**32 m**
- 
**14,3 m**
- 
**330 kg\***  
\*optional
- 
**Bi-energy  
Eco**
- 
**Crawlers  
Wheels**

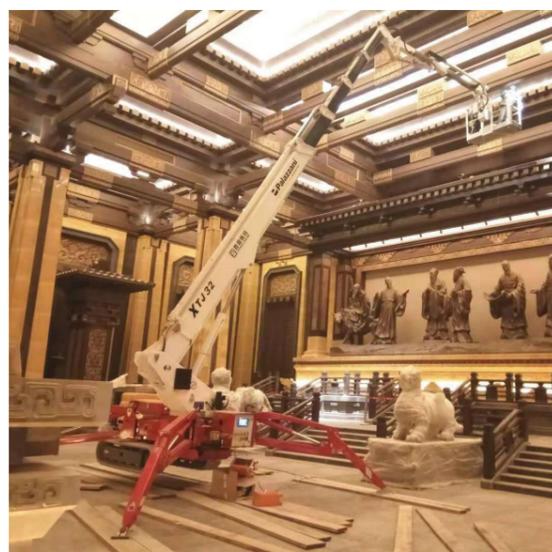



**STANDARD EQUIPMENT**

- Available power options: Bi-energy (Diesel + AC), Eco (AC+Battery)
- Emergency electropump
- CANBUS electronics
- Hydraulic steering and transmission on rubber tracks with hydraulically variable external width
- Independent Outriggers rotating on 2 different positions
- Automatic set-up with self-levelling
- Turntable rotation at 660°
- Steel made telescopic boom + articulated jib
- Hydraulic and electric lines inside the boom
- Removable aluminium alloy aerial cage 180x70x110 cm, with hydraulic rotation 90° + 80°
- "Area manager" limiting device for safe working load 120 and 230 kg
- Load sensor on the cage
- Radio control at the ground + electric control at the cage
- 230VAC electric plug on the cage
- PalSystem with touchscreen monitor for diagnostics and monitoring of operating parameters
- CE Mark homologation certificates, manuals, stickers and spares book in English language



**HYDRAULIC WINCH 500 KG**

The winch, replacing the basket, allows to transform the Spider lift in Spider crane with a maximum lifting capacity of 500 kg. It is supplied with a special mobile support for the basket disassembled.




**QUICK PIPES COUPLING KIT FOR HYDRAULIC WINCH 500 KG**

Coupling system and quick release of the hydraulic winch to accelerate and speed up the replacement between basket and winch, reducing significantly the machine downtime.



**PROTECTION OF PRUNERS**

Covers kit in iron for delicate parts of the machine such as cylinders stems, valves and reels to protect against branches or other materials falling from above.



**BASKET ANTI-COLLISION KIT**

The laser sensors are positioned at the four corners of the basket and monitor the distance between the operator and any vertical obstacles. Ultrasonic sensors check the presence of any obstacles around the perimeter.



**NON-MARKING TRACKS**

white rubber, ideal to operate indoor and/ or on delicate floors




**PEDAL TO THE CAGE**

Safety pedal to operate the movements from the cage.



**ADDITIONAL AIR/WATER PIPES**

Extra-large diameter compressed air/water pipe to the basket.



**CAGES OF DIFFERENT SIZES**

Different sizes aluminium cages for one man, or majored to accommodate more people or bulky equipment.



**TOUCHSCREEN MONITOR IN THE CAGE**

Installed on the cage control panel, providing the operator with all detailed and salient information of the aerial working platform he needs during aerial work.



**KIT PALCONNECT**

Remote connection service with the aerial platform that allows the user to monitor the key parameters of use of the machine and intervene with some of them.




**3<sup>rd</sup> WORKING AREA**

Work area with an increased load, to have the possibility to work with 330 kg of load in the basket



**CUSTOMIZED COLOURS**

Possibility to customize the colours of the tracked lift with different RAL according to the client's corporate livery



**PADS FOR OUTRIGGERS**

Different type of pads to distribute the load of the stabilizers on the ground and have greater stability of the machine.



**ELECTRIC GENERATOR**

230VCA single-phase, powered by the diesel engine, connected to an electrical socket in the cage, for the use of electrical tools during aerial working



**INTERCOM CIRCUIT**

electronic device for voice communication between the operator at height in the basket and the operator on the ground



**ANEMOMETER**

device for measuring the wind, with an acoustic warning of the wind max speed allowed for aerial working



**RETURN TO HOME FUNCTION**

The "return to home" function allows to automatically return to the transport position by pressing a button on the controls.